The "Original" Model 90 Tool Just Got Better Than Ever





- Easily fasten subfloor, underlayment and sleepers to concrete
- Best method for fastening plywood, 1x's, 2x's and more to concrete
- Designed with a flat front and a rear magazine to operate closer to walls
- I New padded grip for greater user comfort
- Precision depth control
- Smooth, rounded tool design protects finished walls
- Rapid payback
- I Lease options available

Call 1-800-528-8183 or visit us online at www.AerosmithFastening.com.


An aerosmith Product...

Defining the Standard for Steel & Concrete Fastening

Aerosmith Fastening Systems 5621 Dividend Road, Indianapolis, IN 46241 Ph: 317.243.5959 Fax: 317.390.6980 Email: info@aerosmithfastening.com



For a Concrete Connection

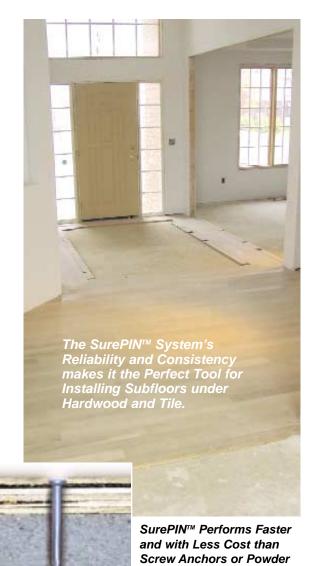

Actuated Tools.

Made in the USA.



For a Concrete Connection

Smooth Shank Plastic Collated Ballistic Point Pins

Email: info@aerosmithfastening.com

Shank Diameter = .145" Head Diameter = 5/16" Zinc Galvanized



Fastening Notes: Determine required pin length based on achieving 3/4" - 1" penetration into the concrete. Space pins 12" apart.

TOOL	ITEM	LENGTH	NOSE	CARTON	ATTACHED TO CONCRETE
CT 9010	5193P	3/4"	503-25-COL	4 M	Luan
CT 9010	5253P	1"	503-25-COL	3.2 M	Luan
CT 9011	5323P	1-1/4"	503-40-COL	1 M	Plywood
CT 9011	5383P	1-1/2"	503-40-COL	1 M	Plywood
CT 9012	5453P	1-3/4"	503-63-COL	1 M	Sleepers / Dim. Lumber
CT 9012	5503P	2"	503-63-COL	1 M	Sleepers / Dim. Lumber
CT 9012	5573P	2-1/4"	503-63-COL	2.4 M	Sleepers / Dim. Lumber
CT 9012	5633P	2-1/2"	503-63-COL	2.4 M	Sleepers / Dim. Lumber

All tools come standard with 494-1 adapter.



at www.AerosmithFastening.com.