



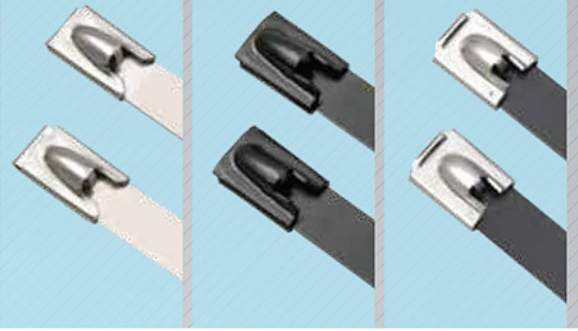


Stainless Steel Cable Ties

UNCOATED STAINLESS STEEL CABLE TIES (AISI 316 STAINLESS STEEL - MOST CORROSIVE ENVIRONMENTS)

Part Number	Width (Inch) (mm)		Length (Inch) (mm)		Thickness (Inch) (mm)		Min Loop lbs	N	Max Bundle Dia (Inch) (mm)		Std. Pkg. Qty
5S6-150-100	0.18	4.6	5.0	127	0.010	0.25	150	667	1.0	25	100
6S6-150-100	0.18	4.6	6.0	152	0.010	0.25	150	667	1.0	25	100
8S6-150-100	0.18	4.6	7.9	201	0.010	0.25	150	667	2.0	51	100
10S6-150-100	0.18	4.6	10.2	259	0.010	0.25	150	667	2.7	69	100
14S6-150-100	0.18	4.6	14.3	363	0.010	0.25	150	667	4.0	102	100
20S6-150-100	0.18	4.6	20.5	521	0.010	0.25	150	667	6.0	152	100
27S6-150-100	0.18	4.6	26.8	681	0.010	0.25	150	667	8.0	203	100
33S6-150-100	0.18	4.6	33.0	838	0.010	0.25	150	667	10.0	254	100
39S6-150-25	0.18	4.6	39.3	998	0.010	0.25	150	667	12.0	305	25
6S6-300-100	0.31	7.9	6.0	152	0.010	0.25	300	1335	1.0	25	50
8S6-300-100	0.31	7.9	7.9	201	0.010	0.25	300	1335	2.0	51	50
14S6-300-100	0.31	7.9	14.3	363	0.010	0.25	300	1335	4.0	102	50
20S6-300-100	0.31	7.9	20.5	521	0.010	0.25	300	1335	6.0	152	50
27S6-300-100	0.31	7.9	26.8	681	0.010	0.25	300	1335	8.0	203	50
33S6-300-100	0.31	7.9	33.0	838	0.010	0.25	300	1335	10.0	254	50
39S6-300-25	0.31	7.9	39.3	1156	0.010	0.25	300	1335	14.0	356	25

ROLLER BALL LOCKING MECHANISM

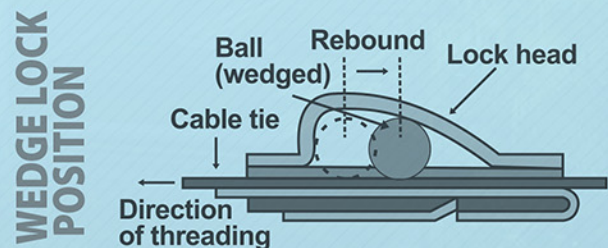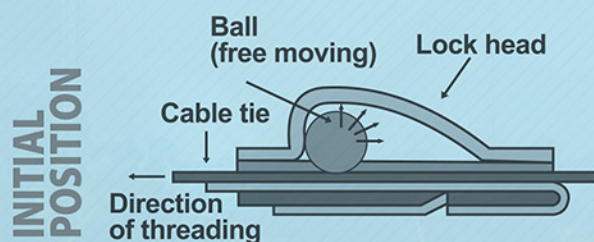

Stainless Steel Cable Ties

COATED STAINLESS STEEL CABLE TIES

Part Number	Width (Inch) (mm)		Length (Inch) (mm)		Thickness (Inch) (mm)		Min Loop lbs N		Max Bundle Dia (Inch) (mm)		Std. Pkg. Qty
8SC6-150-100	0.18	4.6	7.9	201	0.010	0.25	150	667	2.0	51	100
14SC6-150-100	0.18	4.6	14.3	363	0.010	0.25	150	667	4.0	102	100
20SC6-150-100	0.18	4.6	20.5	521	0.010	0.25	150	667	6.0	152	100
27SC6-150-100	0.18	4.6	26.8	681	0.010	0.25	150	667	8.0	203	100
8SC6-300-50	0.31	7.9	7.9	201	0.010	0.25	300	1335	2.0	51	50
14SC6-300-50	0.31	7.9	14.3	363	0.010	0.25	300	1335	4.0	102	50
20SC6-300-50	0.31	7.9	20.5	521	0.010	0.25	300	1335	6.0	152	50
27SC6-300-50	0.31	7.9	26.8	681	0.010	0.25	300	1335	8.0	203	50

- EASY BALL-LOCKING DESIGN WITH SELF-LOCKING MECHANISM
- FULLY ROUNDED EDGES & SMOOTH SURFACES FOR SAFE HANDLING
- 100% STAINLESS STEEL CONSTRUCTION - BODY, LOCK HEAD & LOCK BALL SS316
- SPRECTRUM MULTI-COLORED TIES - ELECTRICAL PHASE IDENTIFICATION & AESTHETICS
- 360 DEGREES FULLY POLYESTER COATED TIES - AVOID GALVANIC CORROSION
- CHEMICAL & WEATHER RESISTANT
- NON-TOXIC & HALOGEN FREE
- LONG SERVICE LIFE > 30 YEARS (INSTALL & FORGET)

CATERING TO A WIDE RANGE OF INDUSTRIES



COMMUNICATION



REFINERIES



SHIPPING



OIL & PETROCHEMICAL



SIGNAGE



AUTOMOTIVE



CABLE INSTALLATION



LOCOMOTIVE