

Shutters Framed Installation Instructions



Thank you for choosing Woodland Harvest or Marquis Shutters. With proper installation and care, your new shutters will provide many years of beauty and performance.

Tools Needed


- Power Drill, 1/4" Driver and drill bits
- Tape Measure
- Phillips Screwdriver
- Pencil
- Level
- Mallet



1. Begin by opening all cardboard sleeves and removing panels from the boxes. Do not yet remove the paper wrap.
2. Lay the framing pieces on the cardboard face down, and by left, right top and bottom.
3. Assemble the frame by using hoffman clamps and a rubber mallet, being careful not to damage where the hinges have been attached. These barrels will be down to the floor.
4. If T-posts are being utilized, attach these into the frame (check for top and bottom labels). T-posts will be numbered from left to right if multiple are needed in the frame.
5. Predrill and countersink the mounting holes approximately 2" down on the sides and 2" in from the corners on the bottom.
6. Take frame to the window and level top and bottom center over the opening. Attach frame with the upper holes only.
7. Attach the panels to hinges and rack bottom of frame until gaps are even. Panels will be labeled on the bottom with reference # first, line number from the order, then panel number for that frame. (Panels are numbered from left to right) Holding the frame, swing the panel open and attach screws in the bottom frame.
8. Attach the magnets and strike plates. Strike plates and magnets should hit on the bottom and top rails, not stiles.

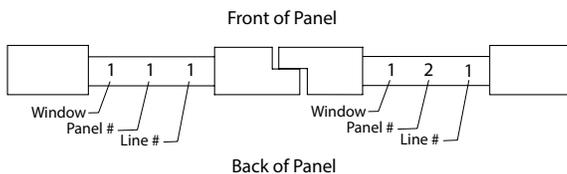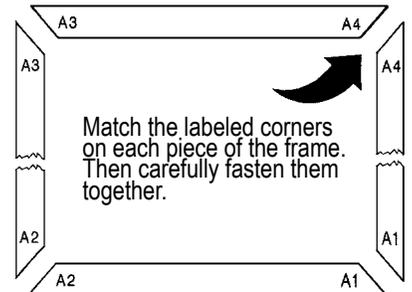

View Bottom of Panel (Marquis Only)



(Woodland Harvest Only)

